

# TEUPEN<sup>®</sup>

...access redefined

## LE013GT

Working height:  
12.75 m

Lateral reach:  
6.05 m

Machine width:  
0.78 m

Machine height:  
1.99 m

Weight:  
1,400 kg

- Compact design, travels through a single door
- Light, low surface load for use on sensitive flooring
- Smooth, proportional electro-hydraulic controls
- Reliable and comprehensive safety control system
- Full height and outreach with 200kg basket load
- Automatic, self leveling outriggers
- Setup on slopes up to 17 %
- Operates on 230 V/12.9 amp electric power

[www.TEUPEN.com](http://www.teupen.com)

Teupen Maschinenbau GmbH  
phone +49 2562 8161 0  
fax +49 2562 8161 888  
mail@teupen.com



### Compact tracked boom lift - LE013GT

Accessing jobsites at height safely and efficiently often poses unsolvable challenges to building managers. Narrow entrances, confined work areas and floor load restrictions can make the use of standard aerial lifts impossible.


With the LEO Series<sup>®</sup>, Teupen offers the original tracked aerial lift in a complete range for demanding indoor and rugged outdoor applications from 13 to outstanding 50 metres working height.




**LEO**SERIES



# LEO 13GT

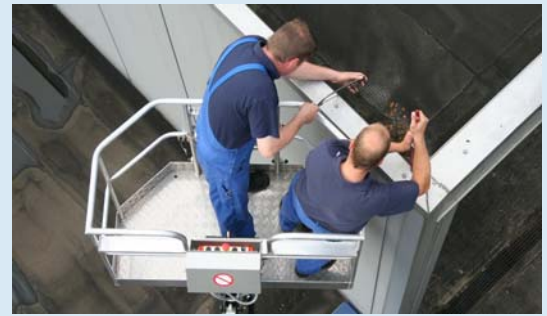

The detachable basket includes a power outlet and an innovative hexagonal shape for easier access to hard-to-reach places.

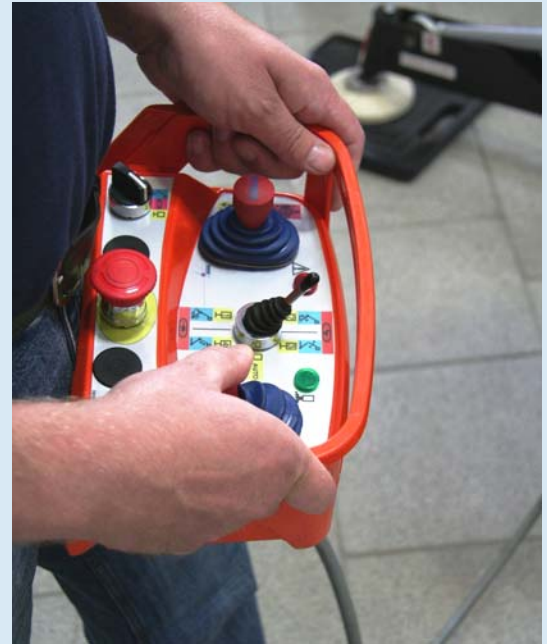

Teupen controls are well-arranged with color coded functions. Only two joysticks and one switch for the entire lift operation.

## Top features:

- Compact** – Fits through standard single door
- Light** – Low ground pressure to protect sensitive surfaces
- Versatile** – Highest maneuverability on white rubber tracks
- Easy** – Automatic self-levelling stabilisers
- Power** – Multiple power sources for indoor and outdoor work

## Overview: LEO Series models from 13 to 18 metres working height

Model	LEO13GT	LEO15GT	LEO15GTplus	LEO18GT	LEO18GTplus
<b>Working height</b>	12,75 m	14,70 m	15,40 m	17,60 m	18,30 m
<b>Outreach</b>	6,05 m	7,60 m	7,90 m	7,40 m	8,50 m
<b>Weight</b>	1400 kg	1780 kg	2200 kg	2400 kg	2450 kg
<b>Width</b>	0,78 m	0,78 m	0,78 m	0,78 m	0,78 m
<b>Movable Jib</b>	-	-	✓	-	✓
<b>Adjustable tracks</b>	-	Option	✓	✓	✓
<b>Diesel engine</b>	Hatz (O)	Hatz (O)	Kubota (O)	Kubota (O)	Kubota (O)
<b>Gas/petrol engine</b>	Subaru (O)	Subaru (S)	Vanguard (S)	Vanguard (S)	Vanguard (S)

LEO = Model, Number = Metric Working height, G = Articulated, T = Telescopic, S = Standard, O = Optional



The light and compact LEO13GT is easily towed on standard trailers. On the jobsite it is easily set up with the automatic leveling system.



The basket is easily detachable for passing narrow entrances. The cable remote control offers a better overview when operating the track drive.